

An Introduction to *Guitar* Package

Xiao Du

Modified: 26 April, 2019. Compiled: October 24, 2023

1 Quick Start with *Guitar*

This is a manual for *Guitar* package. The *Guitar* package is aimed for RNA landmark-guided transcriptomic analysis of RNA-related genomic features.

The *Guitar* package enables the comparison of multiple genomic features, which need to be stored in a name list. Please see the following example, which reads 1000 RNA m6A methylation sites into R for detection. Of course, in actual data analysis, features may come from multiple sets of resources.

```
library(Guitar)

## Loading required package: GenomicFeatures
## Loading required package: BiocGenerics
##
## Attaching package: 'BiocGenerics'
## The following objects are masked from 'package:stats':
##
##   IQR, mad, sd, var, xtabs
## The following objects are masked from 'package:base':
##
##   Filter, Find, Map, Position, Reduce,
##   anyDuplicated, aperm, append, as.data.frame,
##   basename, cbind, colnames, dirname, do.call,
##   duplicated, eval, evalq, get, grep, grepl,
##   intersect, is.unsorted, lapply, mapply, match,
##   mget, order, paste, pmax, pmax.int, pmin,
##   pmin.int, rank, rbind, rownames, sapply, setdiff,
##   sort, table, tapply, union, unique, unsplit,
##   which.max, which.min
## Loading required package: S4Vectors
## Loading required package: stats4
##
## Attaching package: 'S4Vectors'
## The following object is masked from 'package:utils':
##
##   findMatches
## The following objects are masked from 'package:base':
##
##   I, expand.grid, unname
## Loading required package: IRanges
## Loading required package: GenomeInfoDb
## Loading required package: GenomicRanges
## Loading required package: AnnotationDbi
```

```

## Loading required package: Biobase
## Welcome to Bioconductor
##
##   Vignettes contain introductory material; view
##   with 'browseVignettes()'. To cite Bioconductor,
##   see 'citation("Biobase")', and for packages
##   'citation("pkgname)".
## Loading required package: rtracklayer
## Loading required package: magrittr
##
## Attaching package: 'magrittr'
## The following object is masked from 'package:GenomicRanges':
##
##   subtract
## Loading required package: ggplot2
## Loading required package: dplyr
##
## Attaching package: 'dplyr'
## The following object is masked from 'package:AnnotationDbi':
##
##   select
## The following object is masked from 'package:Biobase':
##
##   combine
## The following objects are masked from 'package:GenomicRanges':
##
##   intersect, setdiff, union
## The following object is masked from 'package:GenomeInfoDb':
##
##   intersect
## The following objects are masked from 'package:IRanges':
##
##   collapse, desc, intersect, setdiff, slice, union
## The following objects are masked from 'package:S4Vectors':
##
##   first, intersect, rename, setdiff, setequal,
##   union
## The following objects are masked from 'package:BiocGenerics':
##
##   combine, intersect, setdiff, union
## The following objects are masked from 'package:stats':
##
##   filter, lag
## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
## Attaching package: 'Guitar'
## The following object is masked from 'package:BiocGenerics':
##
##   normalize

# genomic features imported into named list
stBedFiles <- list(system.file("extdata", "m6A_mm10_exomePeak_1000peaks_bed12.bed",

```

```
package="Guitar"))
```

With the following script, we may generate the transcriptomic distribution of genomic features to be tested, and the result will be automatically saved into a PDF file under the working directory with prefix "example". With the `GuitarPlot` function, the gene annotation can be downloaded from internet automatically with a genome assembly number provided; however, this feature requires working internet and might take a longer time. The toy `Guitar` coordinates generated internally should never be re-used in other real data analysis.

```
count <- GuitarPlot(txGenomeVer = "mm10",  
                    stBedFiles = stBedFiles,  
                    miscOutFilePrefix = NA)
```

In a more efficient protocol, in order to re-use the gene annotation and *Guitar coordinates*, you will have to build `Guitar Coordinates` from a `txdb` object in a separate step. The `transcriptDb` contains the gene annotation information and can be obtained in a number of ways, .e.g, download the complete gene annotation of species from UCSC automatically, which might takes a few minutes. In the following analysis, we load the `Txdb` object from a toy dataset provided with the `Guitar` package. Please note that this is only a very small part of the complete hg19 transcriptome, and the `Txdb` object provided with *Guitar* package should not be used in real data analysis. With a `Txdb` object that contains gene annotation information, we in the next build *Guitar coordinates*, which is essentially a bridge connects the transcriptomic landmarks and genomic coordinates.

```
txdb_file <- system.file("extdata", "mm10_toy.sqlite",  
                        package="Guitar")  
txdb <- loadDb(txdb_file)  
guitarTxdb <- makeGuitarTxdb(txdb = txdb, txPrimaryOnly = FALSE)  
  
## [1] "There are 2946 transcripts of 2946 genes in the genome."  
## [1] "total 2946 transcripts extracted ..."  
## [1] "total 2719 transcripts left after ambiguity filter ..."  
## [1] "total 2719 transcripts left after check chromosome validity ..."  
## [1] "total 1342 mRNAs left after component length filter ..."  
## [1] "total 307 ncRNAs left after ncRNA length filter ..."  
## [1] "generate components for all tx"  
## [1] "generate components for mRNA"  
## [1] "generate components for lncRNA"  
## [1] "generate chiped transcriptome"  
## [1] "generate coverage checking ranges for tx"  
## [1] "generate coverage checking ranges for mrna"  
## [1] "generate coverage checking ranges for ncRNA"  
  
# Or use gff. file to generate guitarTxdb  
# Or use getTxdb() to download TxDb from internet:  
# txdb <- getTxdb(txGenomeVer="hg19")  
# guitarTxdb <- makeGuitarTxdb(txdb)
```

You may now generate the `Guitar` plot from the named list of genome-based features.

```
GuitarPlot(txTxdb = txdb,  
           stBedFiles = stBedFiles,  
           miscOutFilePrefix = "example")  
  
## [1] "20231024173043"
```

```

## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate components for mRNA"
## [1] "generate components for lncRNA"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "generate coverage checking ranges for mrna"
## [1] "generate coverage checking ranges for ncRNA"
## [1] "20231024173056"
## [1] "import BED file /tmp/Rtmpf0F2pb/Rinst2949112f6c2271/Guitar/extdata/m6A_mm10_exomePeak_1000peaks
## [1] "sample 10 points for Group1"
## [1] "start figure plotting for tx ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

## [1] "start figure plotting for mrna ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.

```

```

## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

## [1] "start figure plotting for ncrna ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

```

Alternatively, you may also optionally include the promoter DNA region and tail DNA region on the 5' and 3' side of a transcript in the plot with parameter `headOrtail = TRUE`.

```

GuitarPlot(txTxdb = txdb,
           stBedFiles = stBedFiles,
           headOrtail = TRUE)


```

```

## [1] "20231024173126"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate components for mRNA"
## [1] "generate components for lncRNA"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "generate coverage checking ranges for mrna"
## [1] "generate coverage checking ranges for ncrna"
## [1] "20231024173138"
## [1] "import BED file /tmp/Rtmpf0F2pb/Rinst2949112f6c2271/Guitar/extdata/m6A_mm10_exomePeak_1000peaks
## [1] "sample 10 points for Group1"
## [1] "start figure plotting for tx ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

```

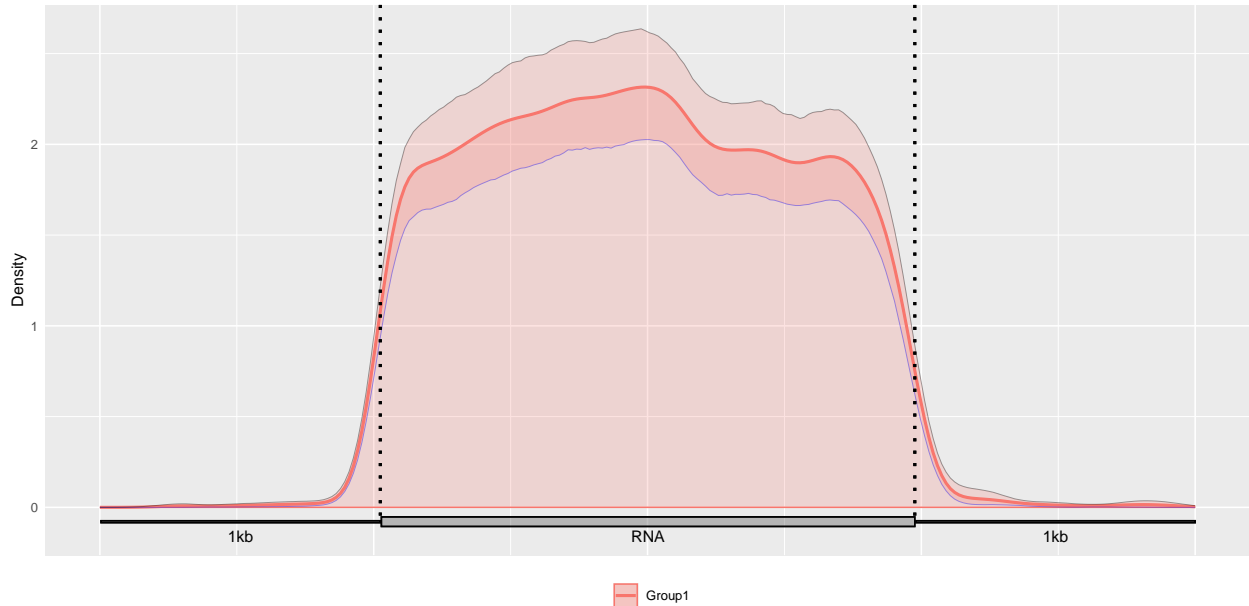


Alternatively, you may also optionally include the Confidence Interval for guitar plot with parameter `enableCI = FALSE`.

```
GuitarPlot(txTxdb = txdb,
           stBedFiles = stBedFiles,
           headOrtail = TRUE,
           enableCI = FALSE)

## [1] "20231024173157"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate components for mRNA"
## [1] "generate components for lncRNA"
## [1] "generate chipped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "generate coverage checking ranges for mrna"
## [1] "generate coverage checking ranges for ncrna"
## [1] "20231024173210"
## [1] "import BED file /tmp/Rtmpf0F2pb/Rinst2949112f6c2271/Guitar/extdata/m6A_mm10_exomePeak_1000peaks"
## [1] "sample 10 points for Group1"
## [1] "start figure plotting for tx ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
```

```
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.
```

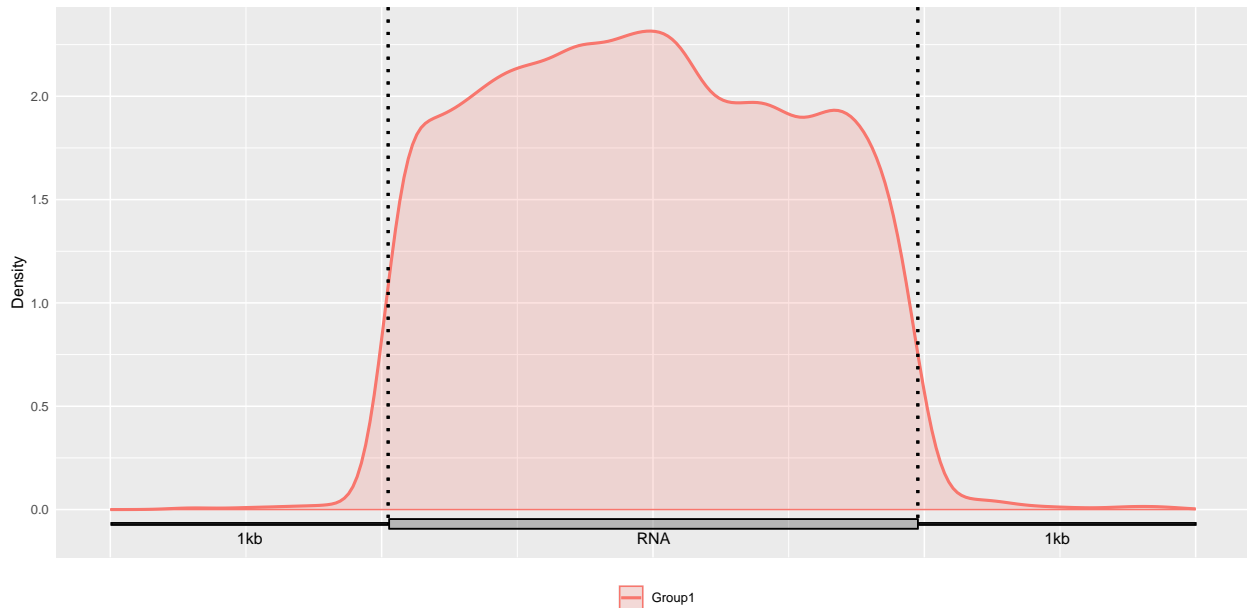

2 Supported Data Format

Besides BED file, Guitar package also supports GRangesList and GRanges data structures. Please see the following examples.

```
# import different data formats into a named list object.
# These genomic features are using mm10 genome assembly
stBedFiles <- list(system.file("extdata", "m6A_mm10_exomePeak_1000peaks_bed12.bed",
                             package="Guitar"),
                  system.file("extdata", "m6A_mm10_exomePeak_1000peaks_bed6.bed",
                             package="Guitar"))

# Build Guitar Coordinates
txdb_file <- system.file("extdata", "mm10_toy.sqlite",
                        package="Guitar")
txdb <- loadDb(txdb_file)

# Guitar Plot
GuitarPlot(txTxdb = txdb,
            stBedFiles = stBedFiles,
            headOrtail = TRUE,
            enableCI = FALSE,
            mapFilterTranscript = TRUE,
            pltTxType = c("mrna"),
```




```

stGroupName = c("BED12", "BED6"))

## [1] "20231024173212"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for mRNA"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for mrna"
## [1] "20231024173224"
## [1] "import BED file /tmp/Rtmpf0F2pb/Rinst2949112f6c2271/Guitar/extdata/m6A_mm10_exomePeak_1000peaks"
## [1] "import BED file /tmp/Rtmpf0F2pb/Rinst2949112f6c2271/Guitar/extdata/m6A_mm10_exomePeak_1000peaks"
## [1] "sample 10 points for BED12"
## [1] "sample 10 points for BED6"
## [1] "start figure plotting for mrna ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

```

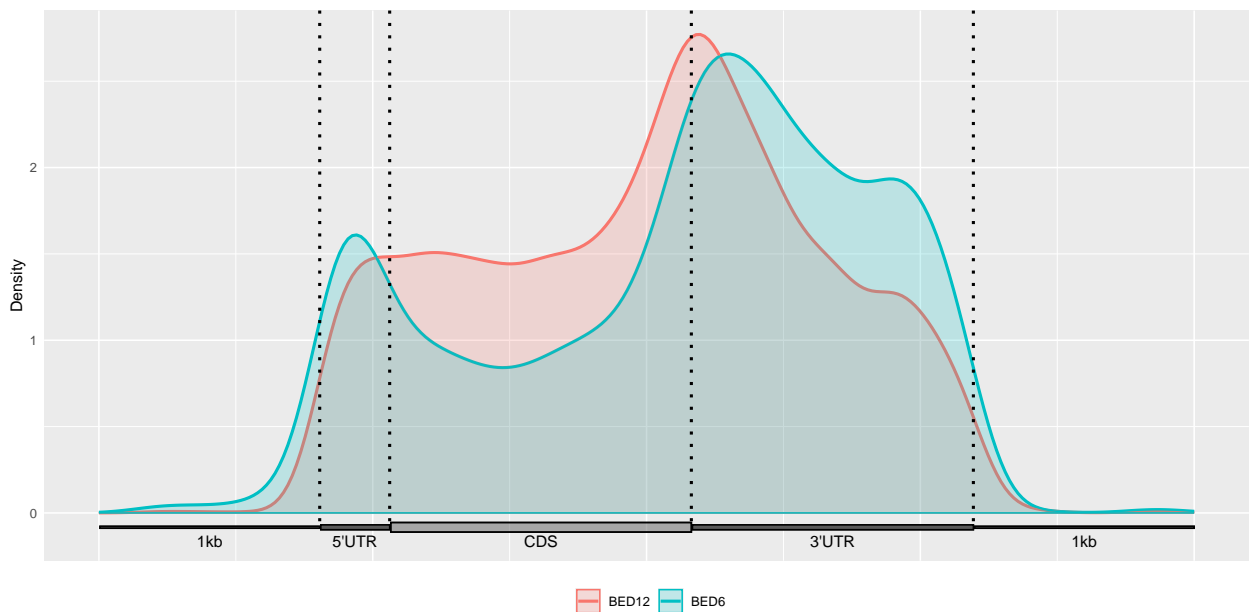

3 Processing of sampling sites information

We can select parameters for site sampling.

```
stGRangeLists = vector("list", length(stBedFiles))
sitesPoints <- list()
for (i in seq_len(length(stBedFiles))) {
  stGRangeLists[[i]] <- blocks(import(stBedFiles[[i]]))
}
for (i in seq_len(length(stGRangeLists))) {
  sitesPoints[[i]] <- samplePoints(stGRangeLists[i],
    stSampleNum = 10,
    stAmbiguity = 5,
    pltTxType = c("mrna"),
    stSampleModle = "Equidistance",
    mapFilterTranscript = FALSE,
    guitarTxdb = guitarTxdb)
}
```

4 Guitar Coordinates - Transcriptomic Landmarks Projected on Genome

The `guitarTxdb` object contains the genome-projected transcriptome coordinates, which can be valuable for evaluating transcriptomic information related applications, such as checking the quality of MeRIP-Seq data. The `Guitar` coordinates are essentially the genomic projection of standardized transcript-based coordinates, making a viable bridge between the landmarks on transcript and genome-based coordinates.

It is based on the `txdb` object input, extracts the transcript information in `txdb`, selects the transcripts that match the parameters according to the component parameters set by the user, and saves according to the transcript type (tx, mrna, ncRNA).

```
guitarTxdb <- makeGuitarTxdb(txdb = txdb,
  txAmbiguity = 5,
  txMrnaComponentProp = c(0.1,0.15,0.6,0.05,0.1),
  txLncrnaComponentProp = c(0.2,0.6,0.2),
  pltTxType = c("tx","mrna","ncrna"),
  txPrimaryOnly = FALSE)

## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate components for mRNA"
## [1] "generate components for lncRNA"
## [1] "generate chipped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "generate coverage checking ranges for mrna"
## [1] "generate coverage checking ranges for ncRNA"
```


5 Check the Overlapping between Different Components

We can also check the distribution of the Guitar coordinates built.

```
gcl <- list(guitarTxdb$tx$tx)
GuitarPlot(txTxdb = txdb,
           stGRangeLists = gcl,
           stSampleNum = 200,
           enableCI = TRUE,
           pltTxType = c("tx"),
           txPrimaryOnly = FALSE
          )

## [1] "20231024173240"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "20231024173253"
## [1] "sample 200 points for Group1"
## [1] "start figure plotting for tx ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'densityCI$confidenceDown' is discouraged.
## i Use 'confidenceDown' instead.
## Warning: Use of 'densityCI$confidenceUp' is discouraged.
## i Use 'confidenceUp' instead.
## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.
```

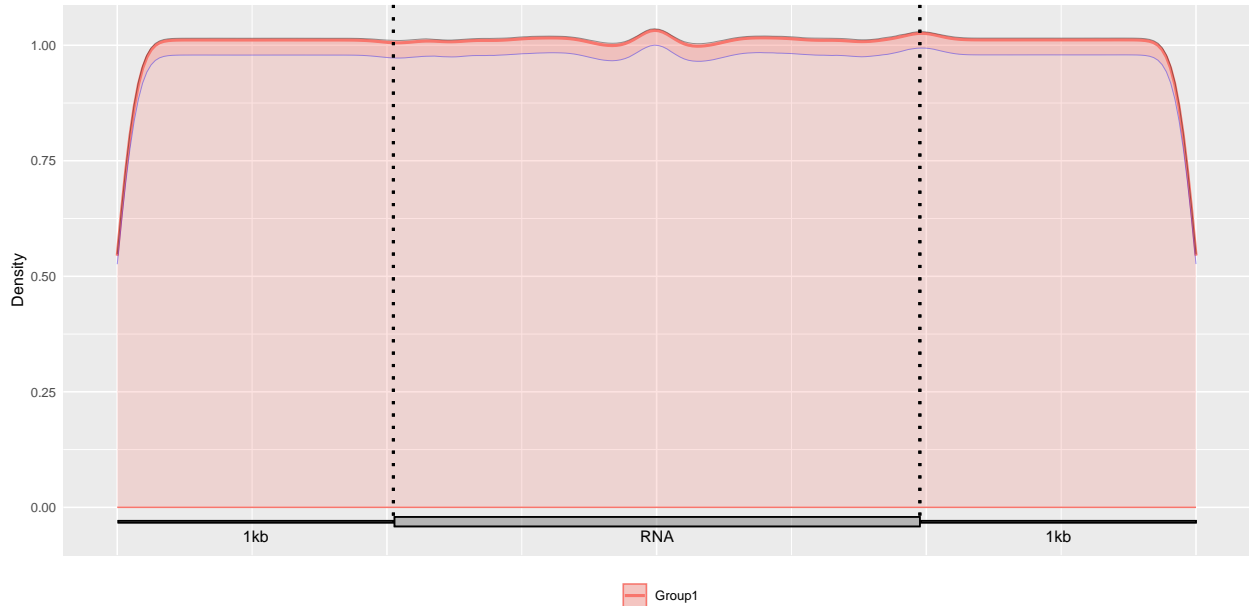


Alternatively, we can extract the RNA components, check the distribution of tx components in the transcriptome

```
GuitarCoords <- guitarTxdb$tx$txComponentGRange
type <- paste(mcols(GuitarCoords)$componentType,mcols(GuitarCoords)$txType)
key <- unique(type)
landmark <- list(1,2,3,4,5,6,7,8,9,10,11)
names(landmark) <- key
for (i in 1:length(key)) {
  landmark[[i]] <- GuitarCoords[type==key[i]]
}
GuitarPlot(txTxdb = txdb ,
           stGRangeLists = landmark[1:3],
           pltTxType = c("tx"),
           enableCI = FALSE
)

## [1] "20231024174031"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for all tx"
## [1] "generate chipped transcriptome"
## [1] "generate coverage checking ranges for tx"
## [1] "20231024174042"
## [1] "sample 10 points for Group1"
## [1] "sample 10 points for Group2"
## [1] "sample 10 points for Group3"
## [1] "start figure plotting for tx ..."

## Warning: Use of 'densityCI$x' is discouraged.
```

```
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.
```

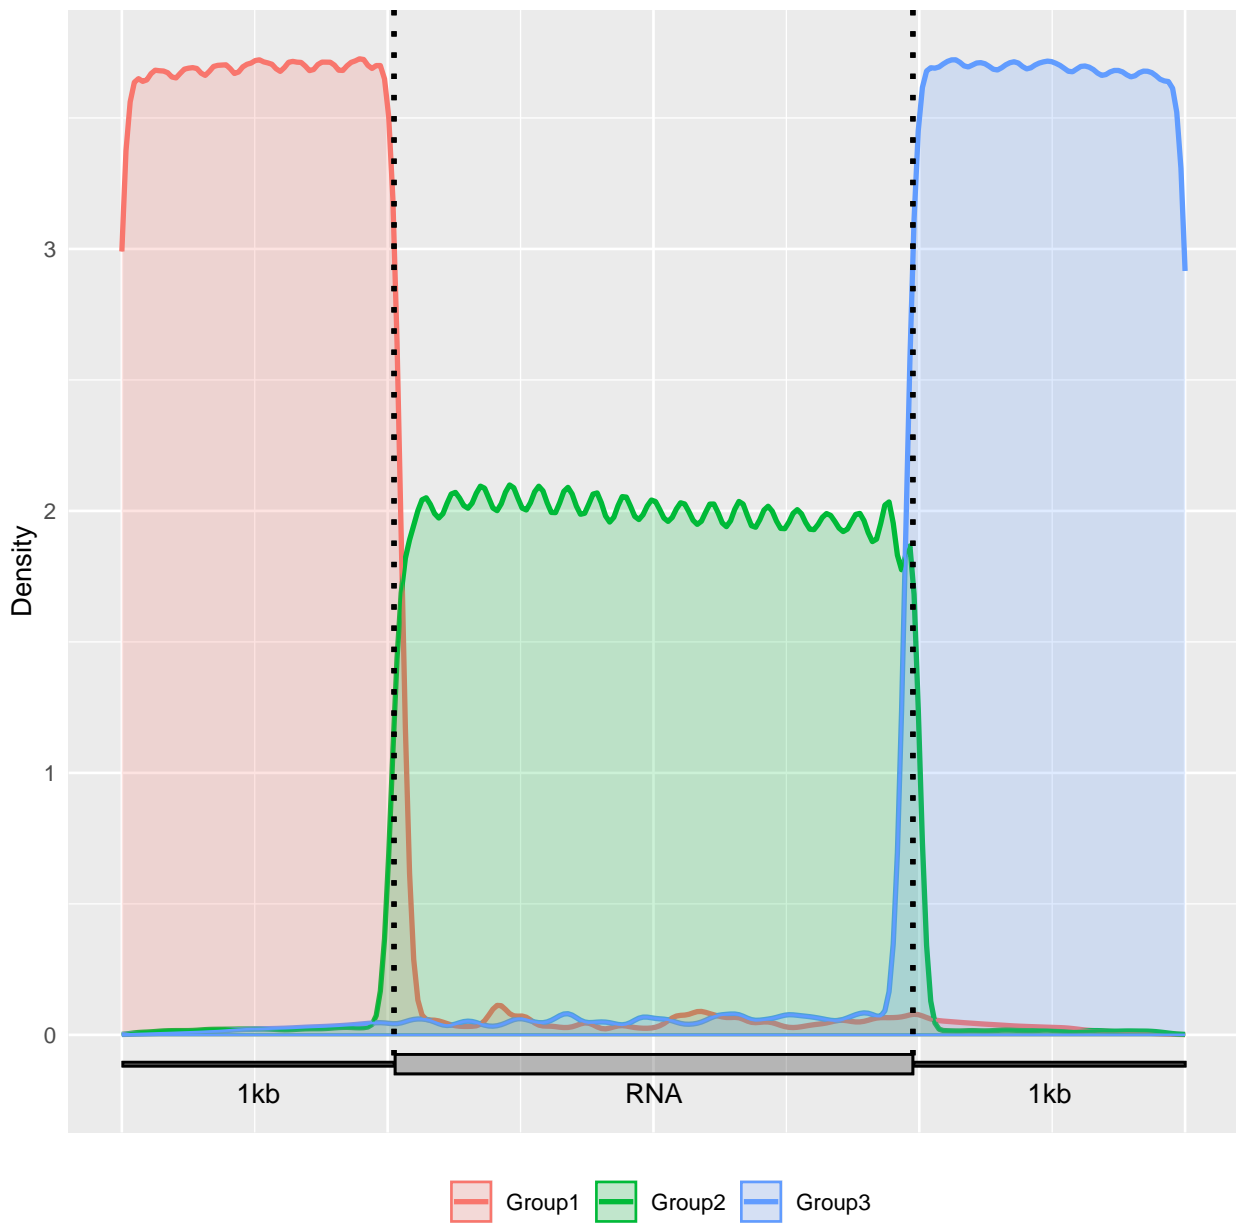

Check the distribution of mRNA components in the transcriptome


```

GuitarPlot(txTxdb = txdb ,
           stGRangeLists = landmark[4:8],
           pltTxType = c("mrna"),
           enableCI = FALSE
)

## [1] "20231024174105"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
## [1] "generate components for mRNA"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for mrna"
## [1] "20231024174115"
## [1] "sample 10 points for Group1"
## [1] "sample 10 points for Group2"
## [1] "sample 10 points for Group3"
## [1] "sample 10 points for Group4"
## [1] "sample 10 points for Group5"
## [1] "start figure plotting for mrna ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.

```

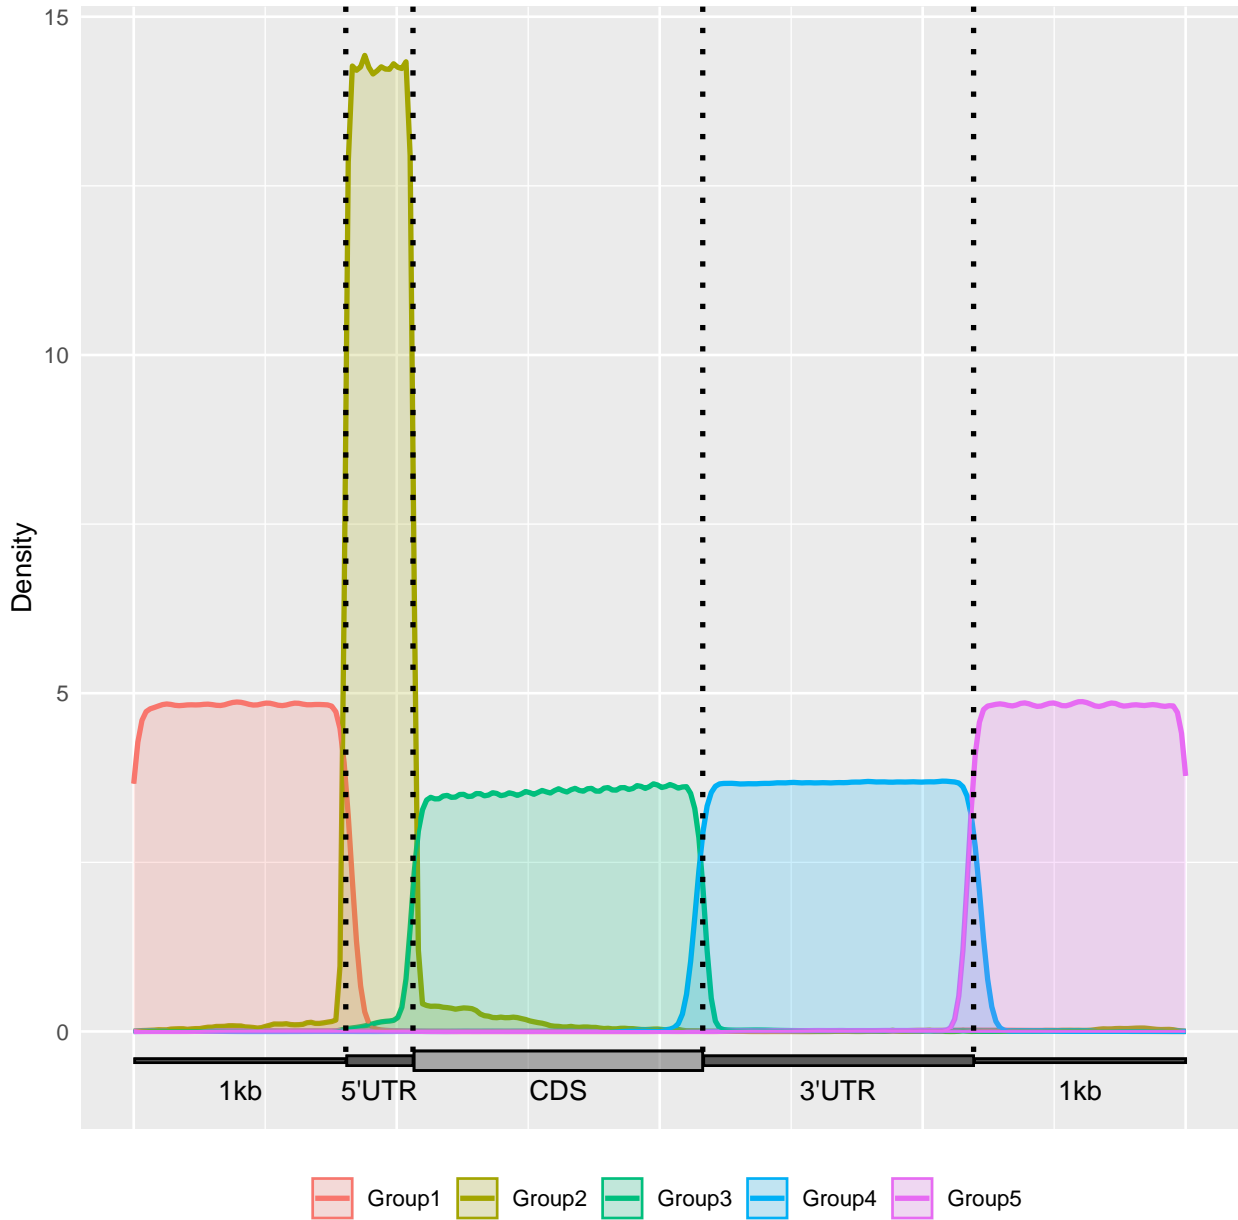


Check the distribution of lncRNA components in the transcriptome

```
GuitarPlot(txTxdb = txdb ,
            stGRangeLists = landmark[9:11],
            pltTxType = c("ncrna"),
            enableCI = FALSE
)

## [1] "20231024174129"
## [1] "There are 2946 transcripts of 2946 genes in the genome."
## [1] "total 2946 transcripts extracted ..."
## [1] "total 2719 transcripts left after ambiguity filter ..."
## [1] "total 2719 transcripts left after check chromosome validity ..."
## [1] "total 1342 mRNAs left after component length filter ..."
## [1] "total 307 ncRNAs left after ncRNA length filter ..."
```

```
## [1] "generate components for lncRNA"
## [1] "generate chiped transcriptome"
## [1] "generate coverage checking ranges for ncrna"
## [1] "20231024174141"
## [1] "sample 10 points for Group1"
## [1] "sample 10 points for Group2"
## [1] "sample 10 points for Group3"
## [1] "start figure plotting for ncrna ..."

## Warning: Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Use of 'densityCI$x' is discouraged.
## i Use 'x' instead.
## Warning: Use of 'vline_pos$x1' is discouraged.
## i Use 'x1' instead.
## Warning: Use of 'vline_pos$y1' is discouraged.
## i Use 'y1' instead.
## Warning: Use of 'vline_pos$x2' is discouraged.
## i Use 'x2' instead.
## Warning: Use of 'vline_pos$y2' is discouraged.
## i Use 'y2' instead.
```

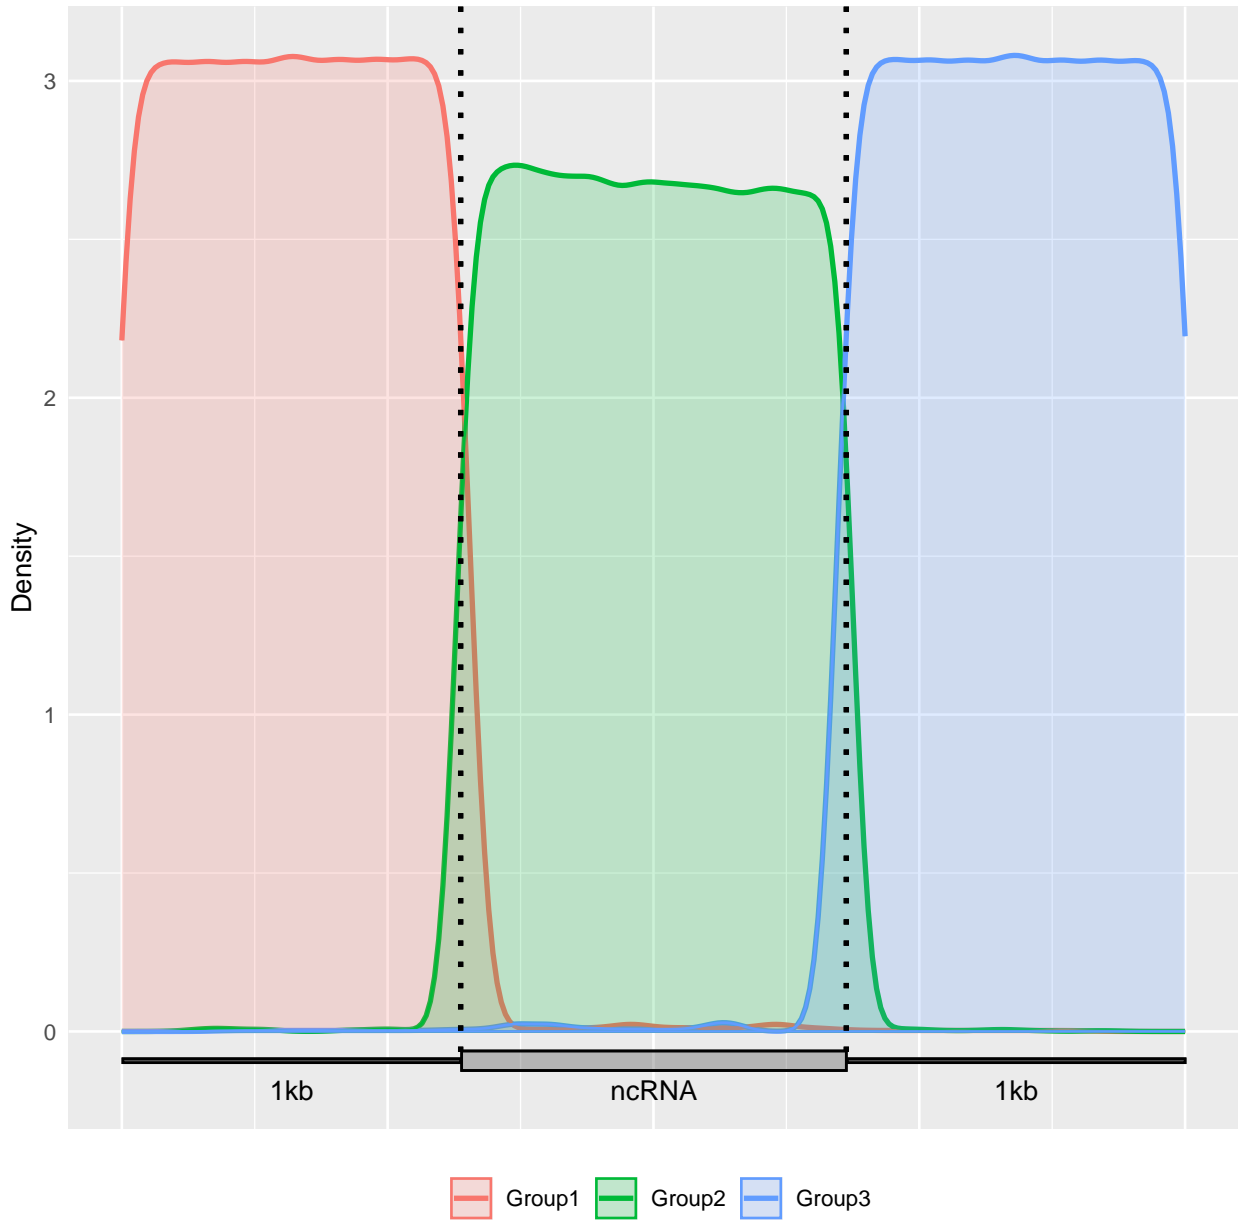6 Session Information

```

sessionInfo()

## R version 4.3.1 (2023-06-16)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Ubuntu 22.04.3 LTS
##
## Matrix products: default
## BLAS: /home/biocbuild/bbs-3.18-bioc/R/lib/libRblas.so
## LAPACK: /usr/lib/x86_64-linux-gnu/lapack/liblapack.so.3.10.0

```

```

##
## locale:
## [1] LC_CTYPE=en_US.UTF-8      LC_NUMERIC=C
## [3] LC_TIME=en_GB             LC_COLLATE=C
## [5] LC_MONETARY=en_US.UTF-8   LC_MESSAGES=en_US.UTF-8
## [7] LC_PAPER=en_US.UTF-8      LC_NAME=C
## [9] LC_ADDRESS=C              LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C
##
## time zone: America/New_York
## tzcode source: system (glibc)
##
## attached base packages:
## [1] stats4      stats      graphics  grDevices  utils
## [6] datasets    methods    base
##
## other attached packages:
## [1] Guitar_2.18.0      dplyr_1.1.3
## [3] ggplot2_3.4.4      magrittr_2.0.3
## [5] rtracklayer_1.62.0 GenomicFeatures_1.54.0
## [7] AnnotationDbi_1.64.0 Biobase_2.62.0
## [9] GenomicRanges_1.54.0 GenomeInfoDb_1.38.0
## [11] IRanges_2.36.0     S4Vectors_0.40.0
## [13] BiocGenerics_0.48.0 knitr_1.44
##
## loaded via a namespace (and not attached):
## [1] tidyselect_1.2.0      farver_2.1.1
## [3] blob_1.2.4           filelock_1.0.2
## [5] Biostrings_2.70.0    bitops_1.0-7
## [7] fastmap_1.1.1        RCurl_1.98-1.12
## [9] BiocFileCache_2.10.0 GenomicAlignments_1.38.0
## [11] XML_3.99-0.14        digest_0.6.33
## [13] lifecycle_1.0.3     KEGGREST_1.42.0
## [15] RSQLite_2.3.1        compiler_4.3.1
## [17] rlang_1.1.1          progress_1.2.2
## [19] tools_4.3.1          utf8_1.2.4
## [21] yaml_2.3.7           prettyunits_1.2.0
## [23] S4Arrays_1.2.0       labeling_0.4.3
## [25] bit_4.0.5            curl_5.1.0
## [27] DelayedArray_0.28.0  xml2_1.3.5
## [29] abind_1.4-5          BiocParallel_1.36.0
## [31] withr_2.5.1          grid_4.3.1
## [33] fansi_1.0.5          colorspace_2.1-0
## [35] scales_1.2.1         biomaRt_2.58.0
## [37] SummarizedExperiment_1.32.0 cli_3.6.1
## [39] crayon_1.5.2         ragg_1.2.6
## [41] generics_0.1.3      httr_1.4.7
## [43] rjson_0.2.21         DBI_1.1.3
## [45] cachem_1.0.8         stringr_1.5.0
## [47] zlibbioc_1.48.0     parallel_4.3.1
## [49] XVector_0.42.0      restfulr_0.0.15
## [51] matrixStats_1.0.0   vctrs_0.6.4
## [53] Matrix_1.6-1.1      hms_1.1.3
## [55] bit64_4.0.5         systemfonts_1.0.5

```

```
## [57] glue_1.6.2          codetools_0.2-19
## [59] stringi_1.7.12      gtable_0.3.4
## [61] BiocIO_1.12.0       munsell_0.5.0
## [63] tibble_3.2.1        pillar_1.9.0
## [65] rappdirs_0.3.3      GenomeInfoDbData_1.2.11
## [67] R6_2.5.1            dbplyr_2.3.4
## [69] textshaping_0.3.7   evaluate_0.22
## [71] lattice_0.22-5      highr_0.10
## [73] png_0.1-8           Rsamtools_2.18.0
## [75] memoise_2.0.1       SparseArray_1.2.0
## [77] xfun_0.40           MatrixGenerics_1.14.0
## [79] pkgconfig_2.0.3
```